

DEALER DEMONSTRATOR

The dealer demonstrator allows a simple demonstration of Triple O's ability to oxidize and filter the contaminants in your customer's water. It is a great sales tool as it shows the customer how the system will work on their water. It also allows the dealer to see if there are other uncommon contaminants in the water that might interfere with normal oxidation processes.

Using the Demonstrator

Fill the container with 2 gallons of your customer's water. Attach the tubing to the generator barb and then to the container. Turn on the system and run for up to **1 hour**. Typically, if the water does not clear in this period of time, it will be resistant to treatment in the tank. Iron and manganese will drop out readily and the particulates will accumulate on the filter. Some tannins (tea like color) may be resistant to treatment. Tannins seem more responsive to chlorine than ozone.

Water directly from the demonstrator will have some ozone taste, but it is not harmful. This taste will be undetectable in the tank.

Warning



DO NOT operate the demonstrator continuously indoors as breathing excess ozone can be an irritant to lungs, eyes and nasal membranes. If you wish to operate for a display, open the generator and unplug the UV lamp. You can run the UV occasionally, several hours, to freshen the container.

Startup Seasoning

Fill the bottle with tank water and run for several hours to remove any residual manufacturing odors.

Maintenance

Clean the diffuser and filter by soaking in a 30%-50% dilute Muriatic acid solution for about 5 minutes and then rinse thoroughly. Replacement filters are available at low cost. Using a clean filter on each demonstration enhances the visual effect of the demonstration.

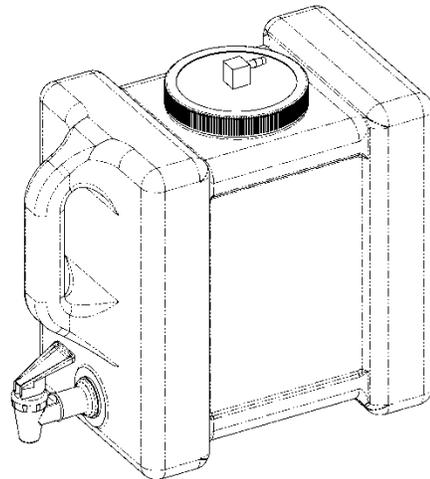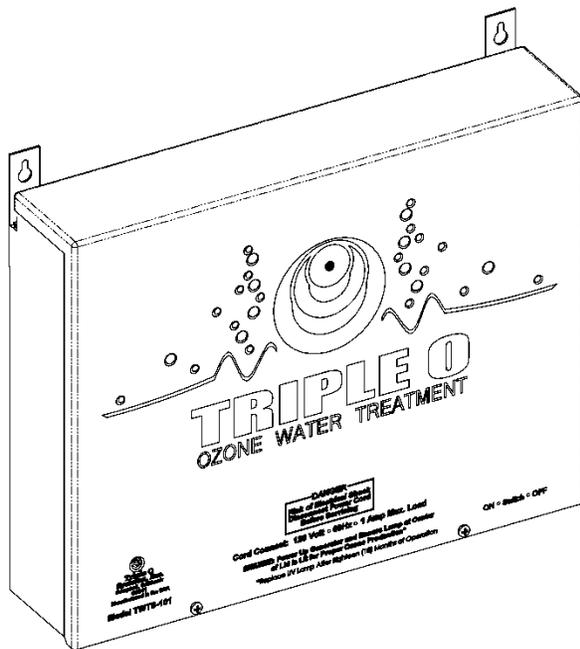

Triple O Systems, Inc.

© 2017 TOS, Proudly Manufactured in USA.

1550 Dell Ave., Unit E, Campbell, CA 95008

(408) 378-3002, Fax (408) 378-7155

www.TripleO.com, Email: Sales@TripleO.com